



POLYKEN® 065
High Strength Transfer Tape


APPLICATIONS

- Corrugate manufacturing.
- Paper converting.
- Printing.
- Frame mounting.
- Laminating.

FEATURES & BENEFITS

- Excellent film strength for reliable consistent automatic splices at full line speed.
- High tack ensures quick grab for automatic splicing systems.
- Outstanding conformability for continuous adhesion on irregular surfaces.

CONSTRUCTION

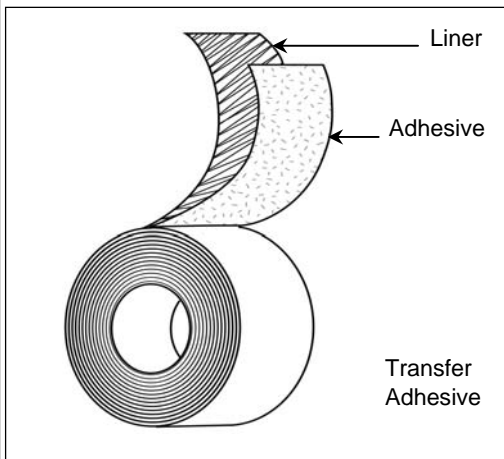

PRODUCT DESCRIPTION

- Transfer Adhesive**
- Fiber-Filled Acrylic
- Adhesive**
- Fiber-Filled Acrylic
- Liner**
- Kraft Paper
- Colors**
- Transparent

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	2.1 mils	53.34 μ	ASTM D-1000
Adhesion to Steel	24 oz./in.	2.63 N/cm	PSTC-1
Tack (Rolling Ball)	2.6"		PSTC-6
Maximum Performance Temperature	395F		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.