



POLYKEN® 105C
Multi-Purpose Double-Coated
Cloth Tape


APPLICATIONS

- Carpet hold-down specially designed for the convention industry.
- Hanging, seaming and splicing of poly sheeting.
- Multi-purpose use for general mounting and holding.
- General purpose uses in aircraft manufacture and construction.

FEATURES & BENEFITS

- High-grade silicone-coated release liner facilitates easy unwind.
- Extremely aggressive adhesive for a secure bond.
- Designed for residue-free removal.

CONSTRUCTION

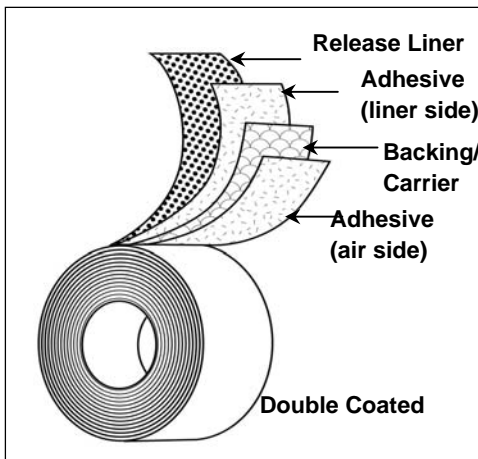

PRODUCT DESCRIPTION

Double Coated Construction

Carrier

- Cloth

Adhesive:

- Rubber

Liner:

- Paper or LDPE

Colors:

- Natural

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Thickness	11 mils	279.40 μ	ASTM D-1000
Adhesion to Steel	40 oz./in.	4.38 N/cm	PSTC-1
Tensile Strength	20 lb./in.	35.03 N/cm	ASTM D-1000
Tack (Rolling Ball)	2 in.		
Maximum Operating Temperature	200 D F		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Plastic's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.