



POLYKEN® 266
Wire Harness Tape


APPLICATIONS

- Uniquely designed for use in wire harness applications for the appliance industry.
- Splice insulation.
- Spot taping.
- Clip retention.
- Continuous wrap over the length of the wire harness.

FEATURES & BENEFITS

- Highly conformable PE-backed cloth tape.
- Non-corrosive when in direct contact with copper wire.
- Unique patented fabric construction and state-of-the-art processing technology result in excellent conformability and elongation properties.

CONSTRUCTION

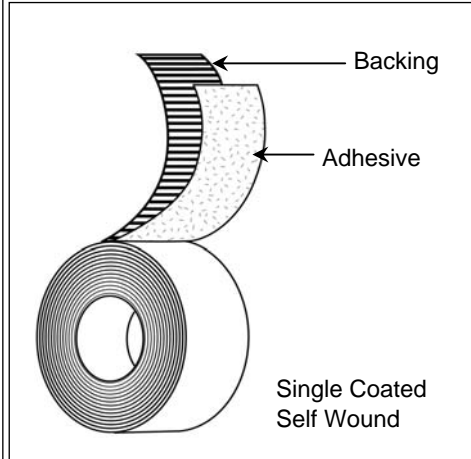

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Multi-layered Polymeric & Fabric Composite

Adhesive:

- Blended Rubber

Colors:

- Black

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	8 mils	203.20 μ	ASTM D 1000
Adhesion to Steel	56 oz./in.	6.13 N/cm	PSTC-1
Adhesion to Backing	21 oz./in.	2.30 N/cm	PSTC-1
Tensile Strength	20 lb./in.	35.03 N/cm	ASTM D 1000
Tack (Rolling Ball)	5"		
Maximum Performance Temperature	200 F		
Elongation (%)	7 %		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical person. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any responsibility.