



NASHUA® 527-20
Select Window Flashing Tape


APPLICATIONS

- Window and Door Installations
- Corner Board Abutments
- Sidewall sheathing seams.
- Deck-to-wall Joints
- Sealing other detail areas against water and air penetration.

FEATURES & BENEFITS

- Provides a strong and immediate bond even in extremely cold application conditions (20°F-160°F)
- Compatible with most caulking materials.
- Resists UV degradation for up to a year of direct sun exposure.
- Easy to remove polyethylene release liner will not tear or absorb moisture.

CONSTRUCTION

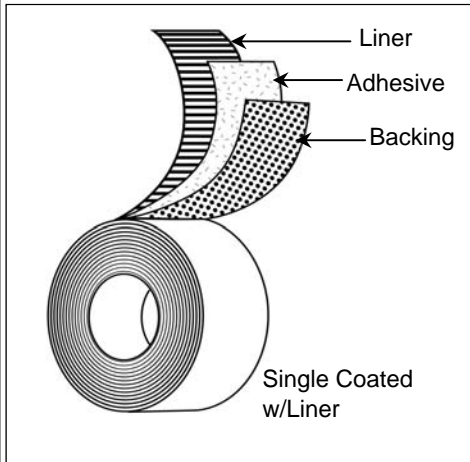

PRODUCT DESCRIPTION

Single-Coated w/Liner Construction

Backing:

- Polyethylene

Adhesive:

- Butyl Rubber

Liner:

- Polyethylene

Colors:

- Black

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	20 mils	508 μ	ASTM D 1000
Adhesion to Plywood	2.0 lbf/in		ASTM D903-93
Tensile (Machine Direction)	600 psi		ASTM D412
Tensile (Cross Direction)	400 psi		ASTM D412
Maximum Operating Temperature	130 F		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any liability.