



LUDLOW™
Regular Plus Removable
Transfer Adhesive

APPLICATIONS

- Business & hospital forms.
- Mailers & envelopes.
- Labels.
- Advertisements.
- Lightweight attachments that require a short-term bond.


FEATURES & BENEFITS

- Clear, lightweight adhesive for temporary bonding.
- Clean removal from a variety of surfaces.
- Slightly more aggressive adhesive than Clear Regular for more difficult surfaces.

Standard Configurations

- 7600-050 1/2" x 6000'
- 7601-050 1/2" x 3000'
- 7602-050 1/2" x 4500'
- 7600-075 3/4" x 30.00'

CONSTRUCTION

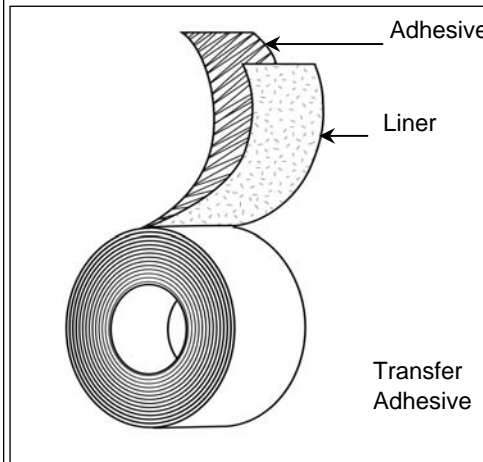

PRODUCT DESCRIPTION

Unsupported GSO Transfer Adhesive Adhesive

- Synthetic Rubber

Liner

- 42# Coated Kraft Paper with Finger-Lift Edge

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Overall Thickness	3.3 mils	83.82 μ	ASTM D-1000
Adhesive Thickness	0.9 mils	22.86 μ	ASTM D-1000
Liner Thickness	2.4 mils	60.96 μ	ASTM D-1000
180° Peel Adhesion	0.5-1.5 lb/in		PSTC-3
	8.0-24.0 oz/in		PSTC-3
Application Temperature Range	40°F - 105°F	4.4°C- 40.6°C	
Operating Temperature Range	0°F - 140°F	-17.7°C- 60°C	

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.