



**NASHUA®**  
Stretch & Seal Self-Fusing  
Silicone Tape


**APPLICATIONS**

- Sealing pipes, electrical wires, and hoses.
- Covering sharp edges.
- Protecting against rust and corrosion.
- General purpose waterproofing and sealing applications.

**FEATURES & BENEFITS**

- Conforms to almost any surface.
- Creates a permanent, watertight seal.
- Chemical and UV resistant.
- Can be applied in wet conditions.
- More temperature resistant than other products (-60F to 500F).
- Easy to apply.
- Easy to remove - no sticky residue.
- Meets or Exceeds the requirements of A-A-59163 Type I and II (formerly MIL-I-46852C)
- Meets UL 510 Specifications

**CONSTRUCTION**

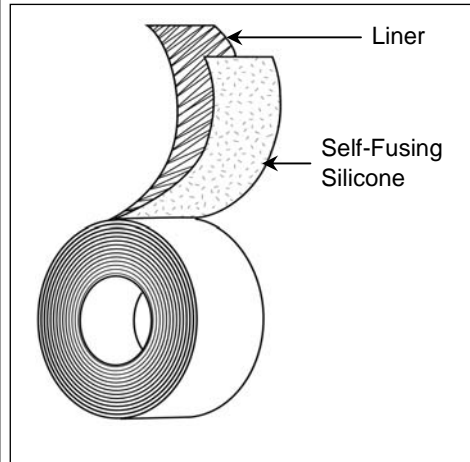

**PRODUCT DESCRIPTION**

**Transfer Adhesive**

**Material**

- Self-Fusing Silicone

**Liner**

- Cellophane

**Colors**

- Black

**TEST DATA**

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	20 mils	508.00 μ	ASTM D-1000
Tensile Strength	700 psi/min		ASTM D-412
Elongation (%)	300 %		ASTM D-412
Dielectric Strength	8000 volts		ASTM D-412
Temperature Range	-60F to 500F		
Tear Resistance	85 psi		

\*\*Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any liability.