

# 444 Line Set Tape



**UV  
Resistant**

**UV Resistant Line Set Tape is designed specifically for wrapping and protecting outdoor lineset installations**

Excellent resistance to UV exposure, mold, humidity, and extreme temperatures.

Exceptional adhesion bonds well to foam insulation.

Tough, yet hand-tearable for easy installation.

Low-VOC product contributes toward satisfying EA and IEQ credits under LEED®.

Re-Order #	Description/Color	Size	RL/CA	CA/Pallet	UPC
685012	444 Black Printed	48mm x 55M	24	36	742366010131
685011	444 Black Unprinted	48mm x 55M	24	36	742366010124

**Division Headquarters**

25 Forge Parkway  
 Franklin, MA 02038  
 Phone: 1-508-918-1600 Fax 1-508-918-1901  
 Toll Free: 1-800-343-7875

**European Sales Office**

Nieuwlandlaan B15  
 3200 Aarschot  
 Belgium  
 Phone: +32 (0)16/55 36 00 Fax: +32 (0)16/55 36 74



Contributes toward  
 LEED® Certification Credits.



# 444



## Berry Plastics® 444 Line Set Tape


### APPLICATIONS

- Alternative to cloth duct tape for long term protection of outdoor line sets.
- Designed for use with foam pipe insulation.

### FEATURES & BENEFITS

- Special UV grade backing for long-term outdoor exposure.
- Excellent performance and superior adhesion even at extremely high or low temperatures.
- Hand tearable for ease of use on site.
- High performance acrylic adhesive for a long term bond.
- Complies with VOC requirements of SCAQMD Rule 1168
- **Contributes toward satisfying EA (Energy & Atmosphere) and IEQ (Indoor Environmental Quality) credits under LEED®.\*\***

### CONSTRUCTION

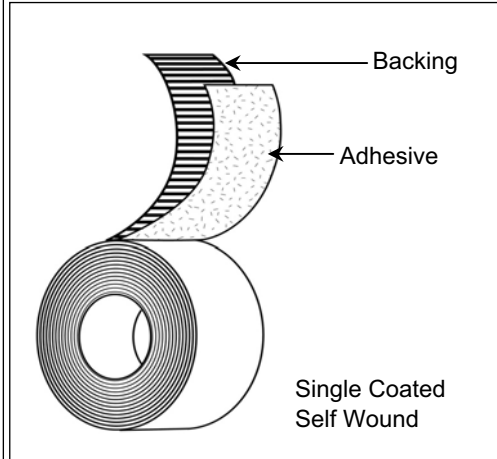

### PRODUCT DESCRIPTION

#### Single-Coated Construction

- Backing:**
- OPP Film
- Adhesive:**
- Acrylic
- Colors:**
- Black

### TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	3.0 mils	76.200 μ	ASTM D-1000
Adhesion to Steel	45 oz./in.	4.92 N/cm	PSTC-1
Adhesion to Backing	35 oz./in.	3.83 N/cm	PSTC-1
Tensile Strength	32 lb./in.	56.04 N/cm	ASTM D-1000
Maximum Performance Temperature	210° F	98.9° C	
VOC Content	0 g/l		

\*\*Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.

