


FlexFix



Listed
 UL 181B-FX

**Contractor-Grade
 Tough OPP Film Tape
 for sealing flexible duct
 and metal to metal
 connections and closures**

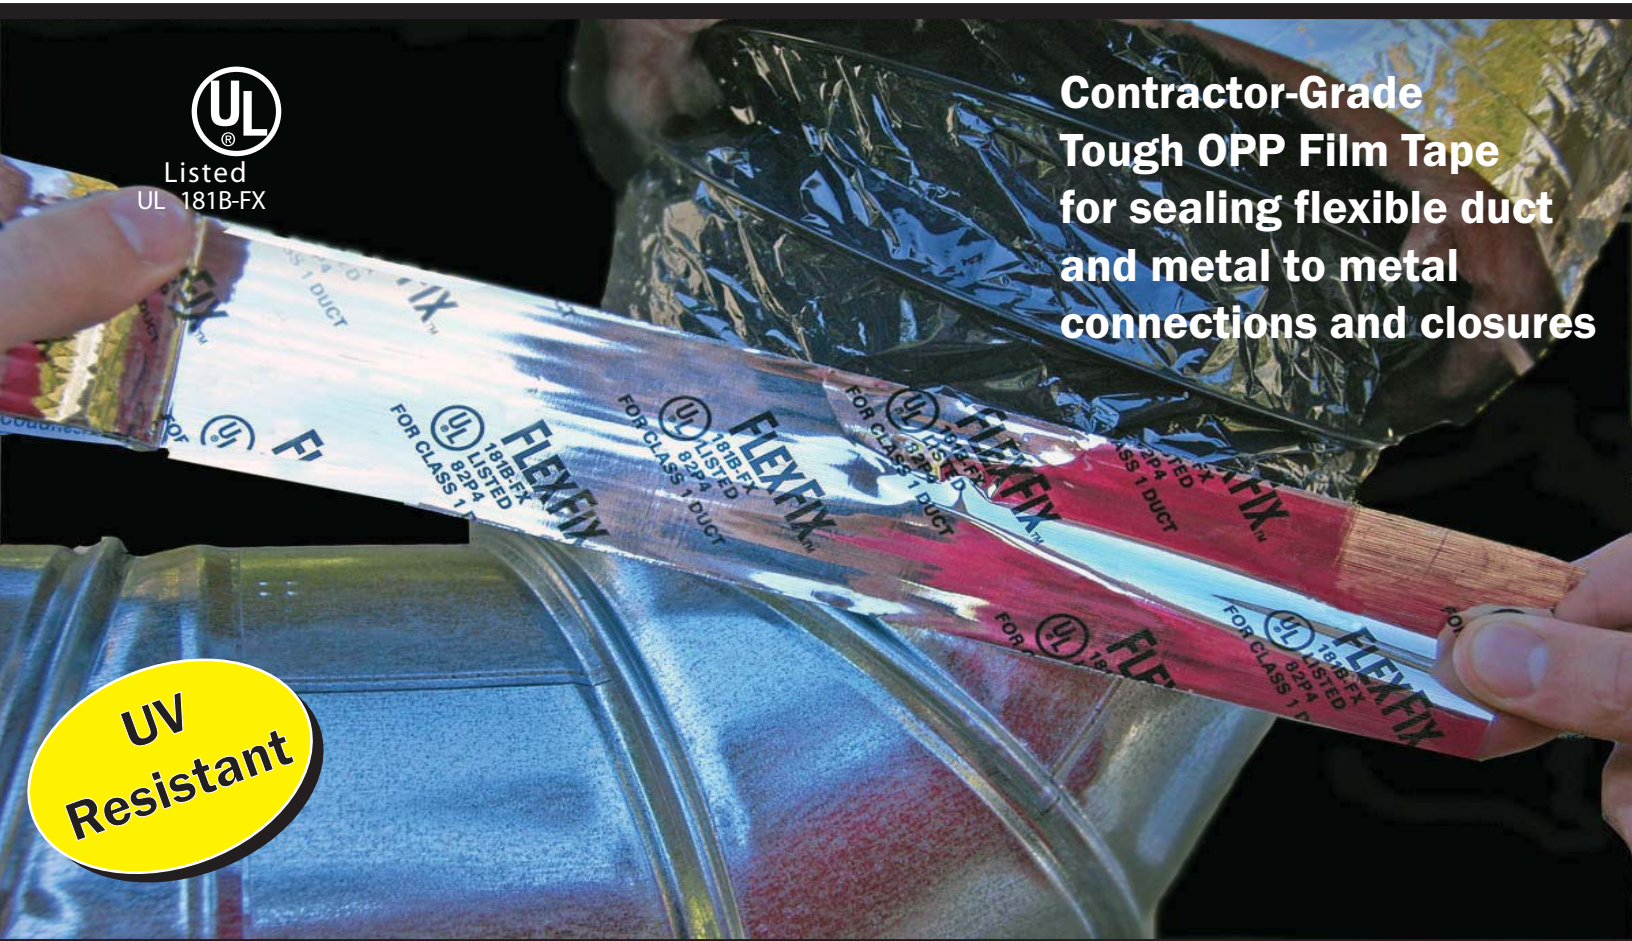

Contractor-Tough yet hand-tearable for easy installation.

Provides exceptional seal to flexible and metal duct connections, as well as reflective and bubble insulation materials.

Excellent resistance to UV exposure, mold, humidity, and extreme temperatures.

Low-VOC product contributes toward satisfying EA and IEQ credits under LEED®.

Re-Order #	Description/Color	Size	RL/CA	CA/Pallet	UPC
880921	FlexFix Metallic	48mm x 110M	36	27	742366006677
880922	FlexFix Metallic	3" x 110M	24	27	742366006707
880924	FlexFix Black	48mm x 110M	36	27	742366006684
880923	FlexFix Black	3" x 110M	24	27	742366006684

1/09

Division Headquarters

25 Forge Parkway
 Franklin, MA 02038
 Phone: 1-508-918-1600 Fax 1-508-918-1901
 Toll Free: 1-800-343-7875

European Sales Office

Nieuwlandlaan B15
 3200 Aarschot
 Belgium
 Phone: +32 (0)16/55 36 00 Fax: +32 (0)16/55 36 74



Contributes toward
 LEED® Certification Credits.



FlexFix



Berry Plastics® **FlexFix**
UL181B-FX Approved BOPP
Duct Tape


APPLICATIONS

- Tough, contractor grade closure system for flexible air ducts and connectors
- Suitable for use on metal to metal connections in HVAC applications
- Provides an exceptional seal on reflective and bubble insulation materials

FEATURES & BENEFITS

- UL 181B-FX Listed (for use with flexible air ducts and closure systems)
- Features a long-life acrylic adhesive
- Hand tearable - Contractor friendly
- Excellent resistance to mold, humidity, flame spread, smoke generation, and high temperatures
- UV Resistant for incidental sunlight exposure in attic installations
- Complies with VOC requirements of SCAQMD Rule 1168
- **Contributes toward satisfying EA (Energy & Atmosphere) and IEQ (Indoor Environmental Quality) credits under LEED®.****

CONSTRUCTION

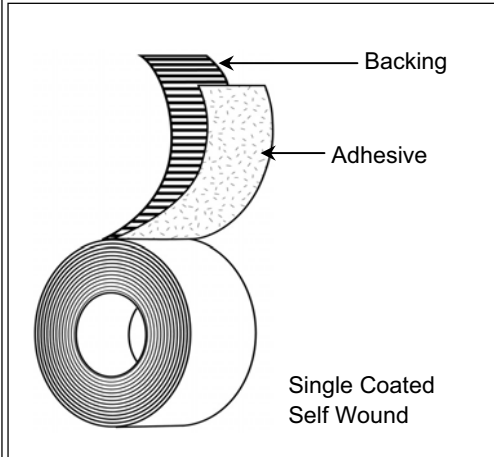

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Printed BOPP Film

Adhesive:

- Acrylic

Colors:

- Black, Metallic

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	3.1 mils	83.820 μ	ASTM D-1000
Adhesion to Steel	45 oz./in.	4.93 N/cm	PSTC-1
Adhesion to Backing	35 oz./in.	3.83 N/cm	PSTC-1
Tensile Strength	32 lb./in.	56.04 N/cm	ASTM D-1000
Maximum Performance Temperature	210° F	98.9° C	
VOC Content	0 g/L		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To the best of our knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, in each case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
1-800-343-7875 Fax 1-800-328-4822
www.berryplastics.com

Nieuwlandlaan B15 Aarschot Belgium
Ph: +32(0)16/55 36 00 Fax: +32 (0)16/55 36 74
1/6/2009