

## Foilmastic™ High Performance Foil Tape



Premium foil tape  
engineered  
specifically  
for flexible duct  
systems



UL181B-FX Listed, printed for easy identification.

Excellent resistance to UV exposure, mold, humidity, and extreme temperatures.

Superior Butyl Rubber Adhesive system provides airtight seal.

Low-VOC product contributes toward satisfying EA and IEQ credits under LEED®.

Re-Order #	Description/Color	Size	RL/CA	CA/Pallet
652120	Nashua Foilmastic	48mm x 31M	24	27
652121	Nashua Foilmastic	3" x 100FT	16	27

1/09





**NASHUA<sup>®</sup> 367-17**  
Printed UL Listed Waterproofing/  
Repair Tape


**APPLICATIONS**

- Indoor/Outdoor sealing of low, medium, and high pressure HVAC systems (includes: sheet metal duct, fiberglass duct board, and flexible duct systems)
- Seal cracks and seams in gutters, roof alleys, eaves, hips, and ridges
- Seal around chimney and vent stacks
- Repair gouges, rips, tears in metal panels of trailers, shipping containers, and metal buildings

**FEATURES & BENEFITS**

- UL 181B-FX Listed (for use with flexible air ducts and closure systems)
- Heavy-duty all-weather foil
- Provides instant water-tight seal
- Excellent resistance to cold, heat, water, and sunlight
- Excellent adhesion to all surfaces
- Extremely conformable
- Paintable 2mil foil backing (use in place of caulk)
- Forms a permanent seal
- Non-staining adhesive
- Printed for easy identification
- PE release liner provides ease of installation
- Complies with VOC requirements of SCAQMD Rule 1168
- **Contributes toward satisfying EA (Energy & Atmosphere) and IEQ (Indoor Environmental Quality) credits under LEED<sup>®</sup>.\*\***

**CONSTRUCTION**

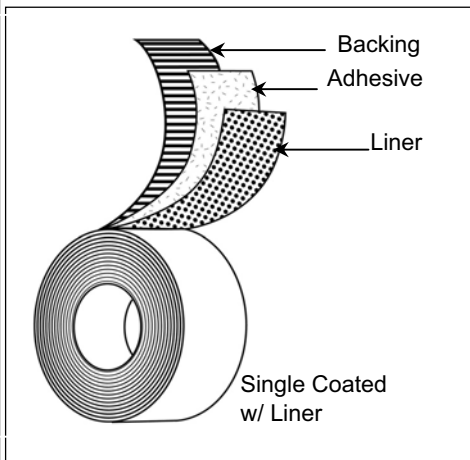

**PRODUCT DESCRIPTION**

**Single-Coated w/Liner Construction**

**Backing:**

- 2 mil Aluminum Foil - Printed

**Adhesive:**

- Butyl Rubber Adhesive

**Liner:**

- LDPE

**Colors:**

- Aluminum

**TEST DATA**

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	17 mils	431.80 μ	ASTM D 1000
Mastic Thickness	15 mils	381.00 μ	ASTM D 1000
Adhesion to Steel	90 oz./in.	9.85 N/cm	PSTC-1
Adhesion to Backing	40 oz./in.	4.38 N/cm	PSTC-1
Tensile Strength	23 lb./in.	40.28 N/cm	ASTM D 1000
Maximum Performance Temperature	200 F		
VOC Content	<1 g/L		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F**

\*\*Products are not reviewed or certified under the LEED<sup>®</sup> Rating System. LEED<sup>®</sup> credit requirements cover the performance of materials in aggregate, the performance of individual products or brands. For more information on LEED<sup>®</sup>, visit [www.usgbc.org/leed](http://www.usgbc.org/leed).

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.