

Stretch & Seal – Silicone Sealing Tape



- Conforms to almost any surface
- Creates a permanent, watertight seal
- Chemical and UV resistant
- May be applied in wet conditions
- More temperature resistant than other products (from -60°F to 500°F)
- Easy to remove – leaves no sticky residue

Ordering Information: Nashua[®] Stretch & Seal Silicone Sealing Tape/Display

Item #	Description	UPC	UCC	Case Pack	Carton Specs	Weight	Cube
684201	Stretch & Seal Black Tape 1 in. x 10 ft.	7-42366006295	50042366006291	24 Rolls/Case	12" x 9" x 4"	4.5 lbs.	.25
684202	Stretch & Seal Black Tape 1 in. x 10 ft.	7-42366007483	50042366007489	24 Rolls/Case	12" x 9" x 4"	4.5 lbs.	.25

12/07



NASHUA®
Stretch & Seal Self-Fusing
Silicone Tape


APPLICATIONS

- Sealing pipes, electrical wires, and hoses.
- Covering sharp edges.
- Protecting against rust and corrosion.
- General purpose waterproofing and sealing applications.

FEATURES & BENEFITS

- Conforms to almost any surface.
- Creates a permanent, watertight seal.
- Chemical and UV resistant.
- Can be applied in wet conditions.
- More temperature resistant than other products (-60F to 500F).
- Easy to apply.
- Easy to remove - no sticky residue.
- Meets or Exceeds the requirements of A-A-59163 Type I and II (formerly MIL-I-46852C)
- Meets UL 510 Specifications

CONSTRUCTION

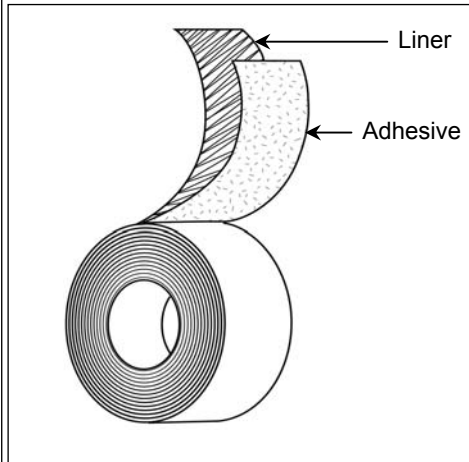

PRODUCT DESCRIPTION

Transfer Adhesive

Material

- Self-Fusing Silicone

Liner

- Cellophane

Colors

- Black, Clear

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	20 mils	508.00 μ	ASTM D-1000
Tensile Strength	700 psi/min		ASTM D-412
Elongation (%)	300 %		ASTM D-412
Dielectric Strength	8000 volts		ASTM D-412
Temperature Range	-60F to 500F		
Tear Resistance	85 psi		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any liability.